

PT46X6 Pressure Sensors

*IDEAL FOR GENERAL PURPOSE
MELT PRESSURE MEASUREMENTS*



Description

The PT46X6 Series transmitter is a $\pm 0.5\%$ sensor ideal for general purpose melt pressure measurements requiring simple installation, repeatability and reliability. The PT46X6 transmitters provide the industry standard 0 - 10 Vdc amplified signal designed to work with DCS and PLCs, 1 - 11 Vdc outputs are also available. The PT46X6 comes equipped with zero and span pots to adapt the transmitter to process conditions. Optional thermocouple or RTD configurations are available to provide melt temperature. The PT46X6 features a 1/2-20 UNF thread for installation in standard transducer mounting holes and can be supplied with a variety of electrical connections.


Features

- Adjustable zero and span
- Accuracy better than $\pm 0.5\%$
- DyMax® coated stainless steel wetted parts
- 0 - 10 Vdc and 1 - 11 Vdc outputs
- 0 - 500 to 0 - 30,000 psi
- Internal 80% shunt calibrations


Performance Characteristics	
Outputs:	
PT46X6:	0 - 10 Vdc
PT46X6B:	1 - 11 Vdc
Input Voltage:	16 - 36 Vdc
Accuracy:	±0.5% FSO combined error (Including Linearity, Repeatability & Hysteresis)
Repeatability:	±0.2% FSO
Configuration:	Four-arm bonded foil Wheatstone bridge strain gage
Load Resistance:	2,000 Ohms minimum
Over Pressure:	2X FSO or 35,000 psi, (whichever is less)
Zero Balance Adjustment Range:	±15%
Span Adjustment Range:	±15%
Internal Shunt Calibration (R-Cal):	80% FSO ±0.5%

Temperature & Mechanical Characteristics	
Max Diaphragm Temperature:	750°F (400°C)
Zero Shift (due to temperature change):	25 psi/100°F Typical (45 psi/100°C)
Electronics Operating Temperature:	-20° to 185°F (-29° to 85°C)
Zero Shift (due to temperature change):	± 0.05% FS/°F max (± 0.10% FS/°C max)
Span Shift (due to temperature change):	± 0.02% FS/°F max (± 0.04% FS/°C max)
Mounting Torque:	500 inch/lbs. max
Standard Wetted Parts:	Dymax® coated 15-5 PH SST

Ordering Guide for PT46X6 Series

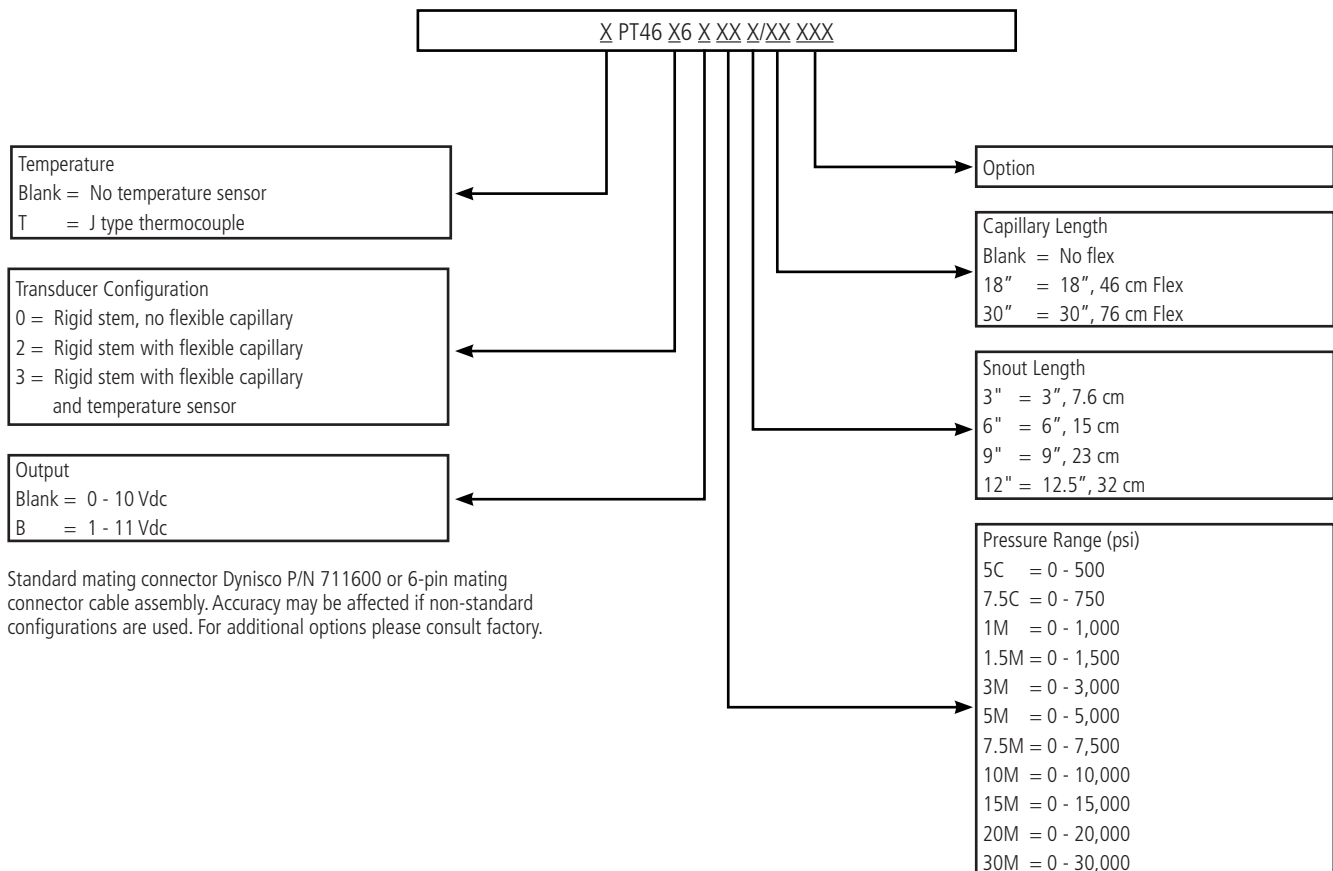

Dimensions

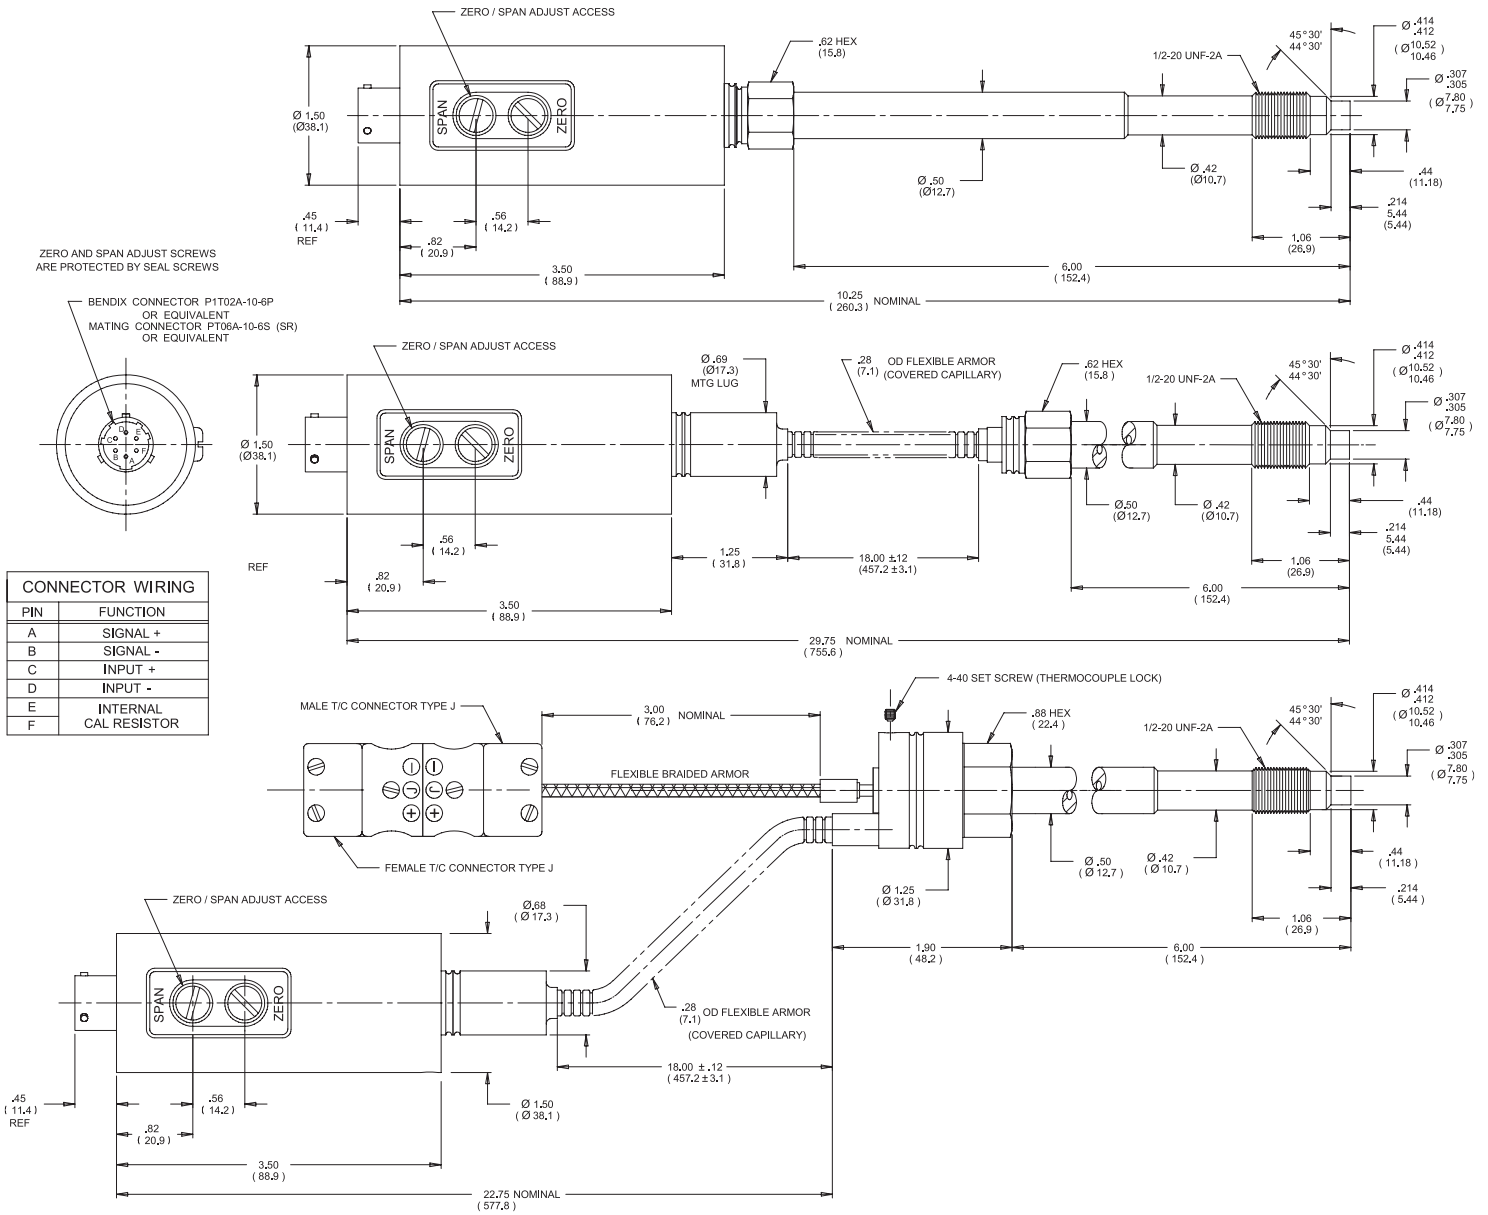

All dimensions are in inches (mm) unless otherwise specified.
 ©2016. Dynisco reserves the right to make changes without notice.
 Refer to www.dynisco.com for access to Operator Manual and other support documentation.
 DSPT46X6
 Rev: 0117



www.dynisco.com

Dynisco
 38 Forge Parkway
 Franklin, MA 02038
 USA
 Hotline 1-800-Dynisco
 www.dynisco.com
 Phone +1 508 541 9400
 Fax +1 508 541 6206
 Email infoinst@dynisco.com

Dynisco Europe, GmbH
 Pfaffenstr. 21
 74078 Hellbronn
 Germany
 Phone +49 7131 297 0
 Fax +49 7131 297 166
 Email dyniscoeurope@dynisco.com

Dynisco Shanghai
 Building 7A, No. 568
 Longpan Rd Malu
 Jiading, 201801 China
 Phone +86 21 34074072-819
 Toll Free +86 400 728 9117
 Fax +86 21 34074025